

# CL30

Self-Leveling Pocket Cross-Liner

## Smallest cross line laser on the market

- High visibility 90° cross line for all interior applications: ceilings, walls, cabinets, shelving, electrical boxes, chair rails, molding, tile, etc.

Buy Now at New England Laser & Transit  
Click to Purchase




# CPL50

Self-Leveling Cross-Liner with Plumb

## The only cross line laser with built-in plumb beam


- High visibility 90° cross line for all interior applications
- 180° plumb beam for floor-to-ceiling point transfer
- Exterior applications with optional receiver

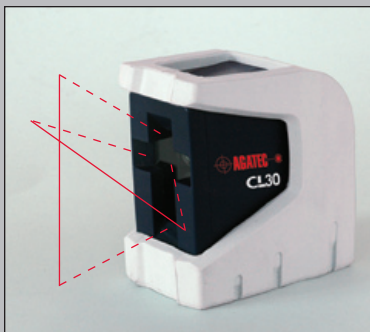

Both lasers have a bright horizontal level line and vertical cross line, and include a handy belt pouch.



The CPL50 comes with a Universal Mounting Accessory. Attach it magnetically to metal studs, use the strap to fasten it to columns, or use the keyhole slot to screw onto a flat surface. Also fits over commercial drywall track.

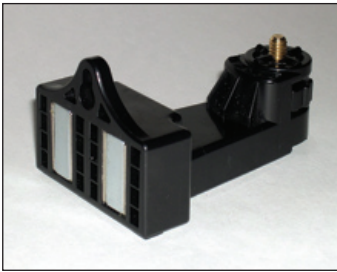

**Universal Mounting Bracket**  
for CL30 mounts to 1/4x20 and 5/8x11 tripods, metal or wood studs, or drywall.



**Ball Joint Swivel Mount**



Mounts between the CL30 or CPL50 and the Universal Mount to "lock-in" a specific position. 360° movement to match points.



**Hand Held/ Rod Mounted Laser Detector**

lets you use the CPL50 outdoors, in very bright light conditions, or at greater distances. Exterior package includes the LS30 Detector and Rod Clamp, and also a 5/8 x 11 Adapter Mount to attach the laser to a construction tripod.



**Floor-to-Ceiling Pole Mount**

Useful for setting heights for cabinets, chair rails, ceilings, electrical boxes, etc. Adjusts to 12' (3.5m).

Includes detachable Ceiling / Wall Mount Bracket with left/right tangent adjustment.



CL30	CPL50	FEATURES AND SPECIFICATIONS
		High-visibility lines from 10mW 635nm diodes
<b>Maximum Line Length for the Best Value</b>		
		CL30: 130° horizontal & vertical fan angles
		CPL50: 130° horizontal; 160° vertical fan angles
		Accuracy to 1/8" @ 30 ft. (3mm / 9m) Operates up to 100 ft. (30m)
		± 4° self-leveling range ± 5° self-leveling range Both have out-of-level blinking beam
<b>Multiple Line Options</b>		
		Horizontal level line
		Vertical plumb line
		Cross line
		Locked line angle in manual mode lets you match an angle between any two points
		Plumb beam
		Pulse mode for outdoor detector use
<b>OPT</b>		Universal mounting bracket
		Convenient belt carrying pouch
		3 AA batteries: 25 hrs. 1-beam operation, 12 hrs. with 2 beams. Auto shut-off to conserve battery life.
		Fully protected by rubber housing
		Size: 4-1/2" x 2-1/4" x 3-7/8"
		Size 3-1/4" x 2-3/8" x 3-5/8"



Other AGATEC precision measuring products include rotating lasers, distance meters, and optical instrumentation.

Both lasers have 4 line options, plus plumb and pulse modes on the CPL50.



AM1125 Printed in US 3/08  
Specifications subject to change without notice.